

**IFP INTERACTIVE DISPLAYS****INFORMATION**

## 65" Google EDLA Certified Interactive display for seamless integration and collaboration in education and enterprise


The TE6514MIS-B2AG is a visionary 4K UHD [Google EDLA Certified](#) interactive display that sets a new standard for ingenuity and performance. Crafted with precision, it features a Zero Airgap LCD screen that eradicates parallax, alongside the accurate PureTouch-IR+ with Palm Rejection, ensuring seamless interaction. Powered by iiWare 12E with Android 13 and equipped with WiFi connectivity, it effortlessly integrates into your ecosystem, supported by the iiyama (DMS) Device management platform.



Experience unparalleled wireless sharing capabilities with the intuitive [iiyama Share](#) and [EShare](#) app, facilitating seamless brainstorming and effective collaboration within your enterprise or educational institution.

With its innovative 4K Interface and [customizable User Profiles](#), the TE6514MIS-B2AG offers a personalized experience, granting easy access to bespoke applications and Cloud Drives. Adapted to thrive in bustling hybrid environments, it becomes a tailored solution for diverse user needs, revolutionizing collaboration, communication, and engagement.

Transforming modern workplaces, educational realms, and dynamic meeting spaces, this display emerges as an essential cornerstone, nurturing progress and connectivity beyond boundaries.

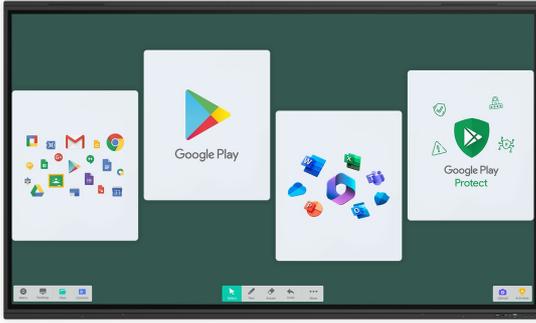

## Google EDLA Certified

Google Enterprise Device License Agreement allows Google apps, accounts, files, and collaborative tools to be easily accessed directly from the Google EDLA certified iiyama displays, offering seamless integration with the Google ecosystem and the entire Microsoft 365 suite for enhanced user experience, productivity, and collaboration in all environments, especially the education and enterprise sectors alike.



## iiyama DMS

iiyama DMS provides organizations with a convenient and fast unified management solution for terminal equipment, builds an efficient and real-time equipment management system, helps digitize the campus/office estate environment and makes device management ultra convenient. iiyama DMS is committed to maintaining compliance with GDPR.



## iiyama Share

Connect up to 9 devices and easily share, stream and edit content from your device to your interactive display and vice versa, back to your laptop, tablet or phone. iiyama Share supports AirPlay, Chromecast and Miracast.



## iiWare 12E

Empower your presentations with iiWare 12E, featuring Google EDLA, iiyama DMS, iiyama Share, Note, Browser, Cloud Drive via an intuitive and user-friendly software that allows you to effortlessly manage, customize, and access various applications with ease.

## SPECIFICATION

### 01 DISPLAY CHARACTERISTICS

<b>Design</b>	Thin bezel
<b>Diagonal</b>	65", 163.9cm
<b>Panel</b>	VA
<b>Touch Glass</b>	Anti-Gloss treatment, Anti-Glare glass, Matt polished surface, Ultra smooth writing, Zero Air-Gap
<b>Panel</b>	VA
<b>Native resolution</b>	3840 x 2160 (8.3 megapixel 4K UHD)
<b>Aspect ratio</b>	16:9
<b>Brightness</b>	450 cd/m <sup>2</sup> (max.)
<b>Light transmittance</b>	92%
<b>Static contrast</b>	4000:1
<b>Dynamic contrast</b>	5000:1
<b>Response time (GTG)</b>	6.5ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	1.07B 10bit (8bit + Hi-FRC) (NTSC 72%)
<b>Horizontal Sync</b>	30 - 135kHz
<b>Viewable area W x H</b>	1428 x 804mm, 56.3 x 31.7"
<b>Bezel width (sides, top, bottom)</b>	16.5mm, 16.5mm, 41mm
<b>Pixel pitch</b>	0.372mm
<b>Bezel colour and finish</b>	black, matte

### 02 TOUCH

<b>Touch technology</b>	PureTouch-IR <sup>+</sup>
<b>Touch points</b>	50, 10pt writing (HID, only with supported OS, 40pt Touch with Android)
<b>Touch accuracy</b>	+ - 1mm
<b>Touch method</b>	stylus, finger, glove (Passive pen, Opaque objects)
<b>Touch interface</b>	USB
<b>Supported operating systems</b>	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
<b>Palm rejection</b>	yes

### 03 INTERFACES / CONNECTORS / CONTROLS

<b>Digital signal input</b>	HDMI x4 (2.0, max. 3840x2160 @60Hz, YUV420/ YUV444/ RGB444) DisplayPort x1 (2.1, max. 3840x2160 @30Hz) USB-C x2 (3.2 (Gen 1, 5Gbit), 3840x2160 @60Hz (RGB444), DP 1.2 Alt mode, Touch, 1x front: 100W PD , 1x back: 15W PD)
<b>Audio input</b>	Mini jack x1

<b>Monitor control input</b>	RS-232c x1 (DSUB 9pin) RJ45 (LAN) x1 (LAN Control) IR x1
<b>Digital signal output</b>	HDMI x1 (2.0, max. 3840x2160 @60Hz, MSD (Multi-Screen Display)) USB-C x1 (3.2 (Gen 1, 5Gbit), 3840x2160 @60Hz, DP 1.2 Alt mode, Touch, 5W PD, MSD (Multi-Screen Display))
<b>Audio output</b>	S/PDIF (Optical) x1 Mini jack x1 Speakers 2 x 18W (Facing up), 2x 8W (Front facing)
<b>HDCP</b>	HDMI: 2.3 + 1.4, DP: 2.3 + 1.3, USB-C: 2.3 + 1.3
<b>USB ports</b>	x6 (media playback / peripherals / storage – front side: 2x v.3.2 (Gen 1, 5Gbit), 1x USB-C v.3.2 (Gen 1, 5Gbit, 100W PD), back side: 2x v.3.2 (Gen 1, 5Gbit), 1x USB-C v.3.2 (Gen 1, 5Gbit, 15W PD))
<b>RJ45 (LAN)</b>	x2 (Auto switch for PC & Android, 1000MB)
<b>Microphone</b>	8-Array (8m voice pick-up, Front facing)

## 04 FEATURES

<b>Integrated software</b>	iiWare 12E (Android 13 OS) featuring iiyama DMS, Google EDLA, Note, web browser, file manager, cloud drives, WPS office, iiyama Share and EShare for wireless connection with Windows/iOS/Android devices.
<b>WiFi</b>	yes (WiFi 6 - Dual WiFi Bandwidth: 2.4GHz/5GHz, WiFi Standard: IEEE 802.11 a/b/g/n/ac/ax, Bluetooth Support: 2.1+EDR/ 3.0/ 4.x/ 5.0)
<b>Hardware</b>	CPU: A76*4+A55*4(2.4GHz), GPU: Mali G610 MC4, RAM: 8GB, ROM: 64GB
<b>Extra</b>	Slot for optional OPS Slot PC, 4x Touch pen (anti-bacterial coating)
<b>Kiosk mode</b>	yes
<b>Max. non-stop operating time</b>	24/7
<b>Media playback</b>	yes
<b>Glass thickness</b>	3mm
<b>Glass hardness</b>	7H
<b>Housing (bezel)</b>	metal
<b>OSD key lock</b>	yes

## 05 GENERAL

<b>OSD languages</b>	EN, DE, FR, ES, IT, RU, CZ, NL, PL, CAT, SV, FI, DA, NB
<b>Control buttons</b>	Power button, Power Indicator, Remote Sensor, Light Sensor, USB-C Connector (3.2)
<b>User controls</b>	general settings (input, volume, backlight), display settings (auto brightness, ECO, eye care, paper eye care, picture mode, brightness, contrast, saturation, sharpness, colour temp., advanced settings), audio settings (audio mode, volume, bass, treble, balance, mute), screen settings (pixel shift, auto light, ECR), application settings (network & internet, apps, storage, personal, Google, advanced, administration, system, about)
<b>Plug&amp;Play</b>	DDC2B
<b>Warranty</b>	5 years (for details and eligible countries please check the Warranty section of our website)

## 06 MECHANICAL

<b>Orientation</b>	landscape
--------------------	-----------

<b>Fanless design</b>	yes
<b>VESA mounting</b>	600 x 400mm
<b>Operation temperature range</b>	0°C - 40°C
<b>Storage temperature range</b>	- 20°C - 60°C
<b>MTBF</b>	50.000 hours (excluding backlight)

## 07 ACCESSORIES INCLUDED

<b>Cables</b>	power, USB, HDMI
<b>Touch pen</b>	x4 (Dual function tips, Anti-bacterial)
<b>Guides</b>	quick start guide, safety guide
<b>Other</b>	Mounting bracket for NUC, Mounting bracket for webcam
<b>Remote control</b>	yes (batteries included)

## 08 POWER MANAGEMENT

<b>Power supply unit</b>	internal
<b>Power supply</b>	AC 100 - 240V, 50/60Hz
<b>Power usage</b>	150W typical, 0.5W stand by, 0.3W off mode

## 09 SUSTAINABILITY

<b>Regulations</b>	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH (RoHS)
<b>REACH SVHC</b>	above 0.1%: Lead

## 10 DIMENSIONS / WEIGHT

<b>Product dimensions W x H x D</b>	1488 x 908 x 86mm
<b>Box dimensions W x H x D</b>	1628 x 1005 x 208mm
<b>Weight (without box)</b>	39kg
<b>Weight (with box)</b>	48.3kg
<b>EAN code</b>	4948570124022

## 11 COMPATIBLE ACCESSORIES

**Other** OPS PC Slot



TE INTERACTIVE SERIES **iiyama**  
TOUCH PENS WITH DUAL FUNCTION  
TIPS AND ANTI-BACTERIAL COATING



x4

TE INTERACTIVE SERIES **iiyama**  
MOUNTING BRACKET FOR NUC



TE INTERACTIVE SERIES **iiyama**  
MOUNTING BRACKET FOR WEBCAM



TE INTERACTIVE SERIES **iiyama**  
MOUNTING BRACKET FOR WEBCAM



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED